




**STRONG PARTNERS.
TOUGH TRUCKS.™**



PEDESTRIAN ERGONOMIC LIFT PALLET TRUCKS

P2.0HL

2 000 KG




P2.0HL

DISTINGUISHING MARK			HYSTER			DISTINGUISHING MARK
	1.1	Manufacturer (abbreviation)	P2.0HL		1.1	
	1.2	Manufacturer's type designation	Battery		1.2	
	1.3	Drive: electric (battery or mains), diesel, petrol, fuel gas	Pedestrian		1.3	
	1.4	Operator type: hand, pedestrian, standing, seated, order-picker	2.0		1.4	
	1.5	Rated capacity/Rated load	0.7		1.5	
		Capacity, load (on the forks)	2.0			
		Capacity, load (on the frame)	600			
	1.6	Load centre distance	906		1.6	
	1.8	Load distance, centre of drive axle to fork ○	1380		1.8	
	1.9	Wheelbase ○			1.9	
WEIGHT	2.1	Service weight	615		2.1	WEIGHT
	2.2	Axle loading, laden front/rear	780	1835	2.2	
	2.3	Axle loading, unladen front/rear	440	175	2.3	
TYRES, CHASSIS	3.1	Tyres: polyurethane, tophane, Vulkollan®, front/rear	Polyurethane / Vulkollan®		3.1	TYRES, CHASSIS
	3.2	Tyre size, front	230 x 75		3.2	
	3.3	Tyre size, rear	85 x 74		3.3	
	3.4	Additional wheels (dimensions)	100 x 40		3.4	
	3.5	Wheels, number front/rear (x = driven wheels)	1x+2	4	3.5	
	3.6	Tread, front	458		3.6	
	3.7	Tread, rear	377		3.7	
DIMENSIONS	4.4	Lift	560		4.4	DIMENSIONS
	4.6	Initial lift	130		4.6	
	4.9	Height drawbar in driving position min./max. ◆	735	1200	4.9	
	4.15	Height, lowered	92		4.1	
	4.19	Overall length	1843		4.1	
	4.20	Length to face of forks	651		4.2	
	4.21	Overall width	700		4.21	
	4.22	Fork dimensions DIN ISO 2331	70	190 1190	4.22	
	4.25	Distance between fork-arms	570		4.25	
	4.32	Ground clearance, centre of wheelbase	20		4.32	
	4.33	Load dimension b ₁₂ × l ₆ crossways	800 x 1200		4.33	
	4.34.1	Aisle width for pallets 1000mm x 1200mm crossways	2368		4.34.1	
	4.34.2	Aisle width for pallets 800mm x 1200mm lengthways	2256		4.34.2	
	4.35	Turning radius ○	1560		4.35	
PERFORMANCE DATA	5.1	Travel speed, laden/unladen	6.0	6.0	5.1	PERFORMANCE DATA
	5.2	Lift speed, laden/unladen ❖	0.09	0.10	5.2	
	5.3	Lowering speed, laden/unladen ❖	0.17	0.15	5.3	
	5.8	Max. gradeability, laden/unladen	8.0	20.0	5.8	
	5.10	Service brake	Electromagnetic		5.10	
ELECTRIC - ENGINE	6.1	Drive motor S2 60 minute rating	1.2		6.1	ELECTRIC - ENGINE
	6.2	Lift motor, S3 15% rating	1.4		6.2	
	6.3	Battery according to DIN 43531/35/36 A,B,C, no	no		6.3	
	6.4	Battery voltage/nominal capacity K ₅	24V	200Ah □	6.4	
	6.5	Battery weight ●	185		6.5	
	6.6	Energy consumption according to VDI cycle	0.44		6.6	
DRIVE/LIFT MECHANISM	8.1	Type of drive unit	AC-Controller		8.1	DRIVE/LIFT MECHANISM
ADDITIONAL DATA	10.7	Sound pressure level at the driver's seat	< 70		10.7	ADDITIONAL DATA

Specification data is based on VDI 2198

TRUCK DIMENSIONS

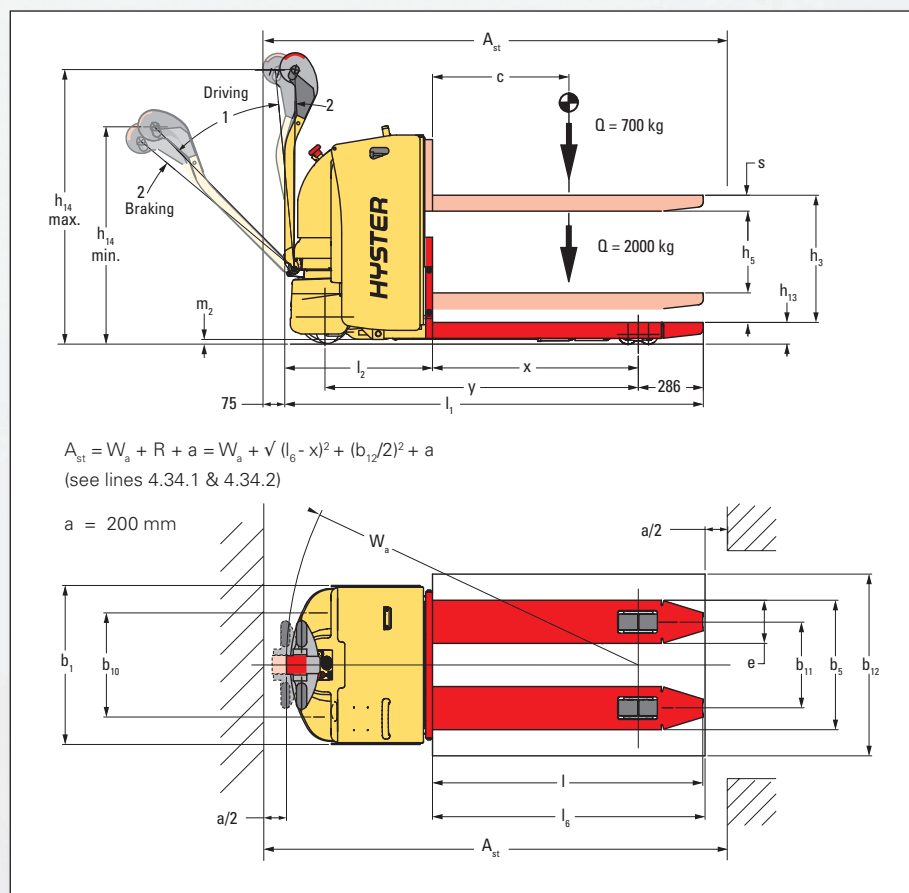

NOTES:

Specifications are affected by the condition of the vehicle and how it is equipped, as well as the nature and condition of the operating area. Inform your dealer of the nature and condition of the intended operating area when purchasing your Hyster Truck.

- With initial lift -85mm
- ◆ Tiller arm in vertical working position (creep speed)
- ❖ h₃: lift
- These values may vary by +/- 5%
- Available battery 24V / 200Ah, 160kg

NOTICE:

Care must be exercised when handling elevated loads. When the carriage and/or load is elevated, truck stability is reduced. It is important that the mast tilt in either direction is kept to a minimum when loads are elevated.

Operators must be trained and must read, understand and follow the instructions contained in the Operating Manual.

All values are nominal values and they are subject to tolerances. For further information, please contact the manufacturer.

Hyster products are subject to change without notice. Lift trucks illustrated may feature optional equipment. Values may vary with alternative configurations.

CE Safety:

This truck conforms to the current EU requirements.

PRODUCT FEATURES

DEPENDABILITY

- The chassis design has a fully enclosed battery compartment and steel battery box lid with welded fork profile for exceptional durability.
- CANbus communication system leads to less downtime.
- The P2.0HL design is based on the larger family of Hyster Pallet trucks, already proven in tough applications worldwide.

PRODUCTIVITY

- Powerful AC traction motor provides superior performance and increased loads moved per hour.
- Ample load capacity with 2 000 kg on the load arms and 700 kg on the forks.
- Lift capability is up to 780 mm (including both initial lift and supplementary fork lift).
- Supplementary fork lift for precise load positioning.
- Narrow and short chassis dimensions facilitate manoeuvrability in limited spaces.
- When the tiller head in an upright position the creep speed button can provide even more precise manoeuvring.

SERVICEABILITY

- 12 month or 1 000 service intervals.
- AC motor is virtually maintenance free.
- Simple access to key components.

ERGONOMICS

- Designed specifically for reducing stress to the operator's back during order picking operations or when restocking shelves.
- Low mounted, long tiller arm with low steering effort for ease of use.
- Ergonomic tiller head with easy grip handles and all direction, acceleration and lift controls within easy reach of fingers.
- Easy to read Multifunctional Display Indicator (MDI), hour meter, battery discharge indicator and emergency disconnect button.

LOW COST OF OPERATION

- Designed with the comfort of the operator as a priority, leading to satisfaction of personnel and fast turnaround, improving business results.
- A low cost, productive solution for order picking or stock replenishment at low levels.
- Designed specifically to suit the needs of small scale retail operations, for instance DIY stores or supermarkets.
- Optional on board charger allows easy charging at any mains socket, keeping the trucks working whenever they are needed.

STRONG PARTNERS. TOUGH TRUCKS.™

FOR DEMANDING OPERATIONS, EVERYWHERE.

Hyster supplies a complete range of warehouse equipment, IC and electric counterbalanced trucks, container handlers and reach stackers. Hyster is committed to being much more than a lift truck supplier.

Our aim is to offer a complete partnership capable of responding to the full spectrum of material handling issues: Whether you need professional consultancy on your fleet management, fully qualified service support, or reliable parts supply, you can depend on Hyster.

Our network of highly trained dealers provides expert, responsive local support. They can offer cost-effective finance packages and introduce effectively managed maintenance programmes to ensure that you get the best possible value. Our business is dealing with your material handling needs so you can focus on the success of your business today and in the future.



HYSTER EUROPE

Centennial House, Frimley Business Park, Frimley, Surrey, GU16 7SG, England.

Tel: +44 (0) 1276 538500



www.hyster.eu



infoeurope@hyster.com



[/HysterEurope](https://www.facebook.com/HysterEurope)



[@HysterEurope](https://twitter.com/HysterEurope)



[/HysterEurope](https://www.youtube.com/HysterEurope)



HYSTER-YALE UK LIMITED trading as Hyster Europe. Registered Address: Centennial House, Building 4.5, Frimley Business Park, Frimley, Surrey, GU16 7SG, United Kingdom. Registered in England and Wales. Company Registration Number: 02636775.

HYSTER,  and FORTENS are registered trademarks in the European Union and certain other jurisdictions.

MONOTROL® is a registered trademark, and DURAMATCH and  are trademarks in the United States and in certain other jurisdictions.

Hyster products are subject to change without notice. Lift trucks illustrated may feature optional equipment.