



Great *brilliant* results

Professional floor machines
For daily, periodical and deep maintenance



EASY LINE TP: economical, practical and light. Ideal for daily cleaning.



Protective guard for the belt drive system.



Belt drive.



Gear transmission with 3 nylon cogs. TP 43 G version.



High volume optional tank (15 l) with tool-free installation. Base supports keep the tank upright to facilitate filling operations.



Extension cord with EU plug, 15 m. Also available with UK plug.

TP 43 180

TP 43 G

FLOOR TREATMENTS



washing



scuffing



smoothing
re-smoothing



polishing
re-polishing



crystallization




- Corded floor machines with belt drive, stainless steel frame and base cover in PPL
- For daily light floor maintenance and deep cleaning



- Corded floor machines with gear transmission, 3 nylon cogs, stainless steel frame and base cover in PPL
- For regular floor maintenance



Carpet brush, PPL
0,45 mm.

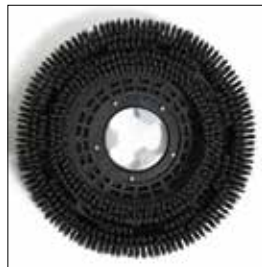

Abrasive brush
Tynex type.



Pad driver
standard.



Extra weight – 7 kg.
For TP 43 G only.



Off-set position of the
motor ensures the even
distribution of weight
and guarantee effortless
use by the operator.

TP 43 400

TP 43 DS

FLOOR TREATMENTS



washing



scuffing



smoothing
re-smoothing



polishing
re-polishing



crystallization




- Floor machine with belt drive, stainless steel frame and base cover in PPL
- Polishing treatment or dry maintenance
- Low noise thanks to the belt drive system



- Corded floor machine with belt drive, stainless steel frame and base cover in PPL
- Two speed version with speed selector button




Abrasive brush
Tynex type.

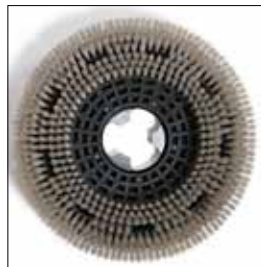

Scrubbing brush in PPL
0,75 mm.



Cushioned pad driver for high speed
For TP 43 and TP 43 DS.

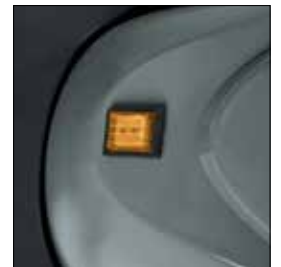

Speed selector button
for TP 43 DS.



EASY LINE FLOOR MACHINES

TECHNICAL DESCRIPTION		TP 43 G	TP 43 180	TP 43 400	TP 43 DS
Transmission		gear with 3 nylon cogs	Belt	Belt	Belt
Power (average)	W	1100	1100	1400	1250/1700
RPM speed	rpm	160	180	400	180/400
Brush	Ø mm	430	430	430	430
Pad driver	Ø mm	430	430	430	430
Tank capacity	l	15	15	-	15
Machine weight	Kg	35	35	35	35
Extra weight	Kg	7	-	-	-
Noise level (IEC 704/1)	dB(A)	60	60	60	60
Dimensions (WxHxL)	cm	46x120x56	46x120x56	46x120x56	46x120x56

METAL LINE TF: robust and effective for maintenance and specific treatment operations.



Extension cord with EU plug, 15 m. Also available with UK plug.



15 l tank available.



Gear transmission with 3 nylon cogs.



Gear transmission with 3 steel-on-nylon cogs For PLUS versions.



Scrubbing brush in PPL 0,75 mm

TF 33

TF 43 - TF 43 PLUS

FLOOR TREATMENTS



washing



scuffing



smoothing
re-smoothing



polishing
re-polishing



crystallization




- Compact floor machine ideal for small spaces
- Gear transmission with nylon cogs
- Steel base
- Maintenance and heavy-duty floor work




- Compact and powerful floor machine
- Gear transmission with nylon cogs
- PLUS version with gear transmission and steel-on-nylon cogs
- Steel base
- High motor power
- Intensive maintenance and floor treatment operations



High volume optional tank (15 l) with tool-free installation. Base supports keep the tank upright to facilitate filling operations.



Carpet brush, PPL 0,45 mm.



Abrasive brush Tynex type.



Pad driver standard.



Pad driver for sand paper.

TF 50 - TF 50 PLUS

FLOOR TREATMENTS



washing



scuffing



smoothing
re-smoothing



polishing
re-polishing



crystallization



- Compact and powerful floor machine
- Gear transmission with nylon cogs
- PLUS version with gear transmission and steel-on-nylon cogs



- Steel base
- High power motor
- Intensive maintenance and floor treatment operations

User can position the handle in any of the many pre-set positions to obtain the ideal operating posture.




Gear transmission with steel-on-nylon cogs for PLUS versions.



Scrubbing brush in PPL 0,75 mm



Pad driver standard.

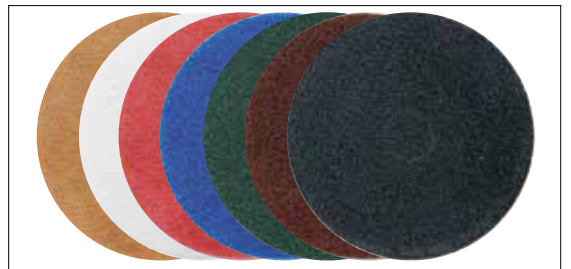

ABRASIVE PADS in nylon, 22 mm thickness. Ø 330 mm for TF33, Ø 430 mm for TF43 and Ø 505 mm for TF 50.



METAL LINE FLOOR MACHINES

TECHNICAL DESCRIPTION		TF 33	TF 43	TF 43 PLUS	TF 50	TF 50 PLUS
Transmission		gear with 3 nylon cogs	gear with 3 nylon cogs	gear with 3 nylon/steel cogs	gear with 3 nylon cogs	gear with 3 nylon/steel cogs
Power (average)	W	1100	1100	1100	1100	1100
RPM speed	rpm	160	160	160	160	160
Brush	Ø mm	330	430	430	500	500
Pad driver	Ø mm	330	430	430	500	500
Tank capacity	l	15	15	15	15	15
Machine weight	Kg	32	37	37	42	42
Extra weight	Kg	-	2	2	2	2
Noise level (IEC 704/1)	dB(A)	61	60	60	60	60
Dimensions (WxHxL)	cm	46x120x50	46x120x56	46x120x56	50x120x56	50x120x56

HEAVY LINE TS: Powerful and robust. For all applications, ideal for specialists.



Extension cord with EU plug, 15 m. Also available with UK plug.



High volume optional tank (15 l) with tool-free installation. Base supports keep the tank upright to facilitate filling operations.



Gear transmission with steel cogs.



Designed to fit with an additional weight for higher washing performance and to obtain superior washing and polishing results.



Scrubbing brush in PPL 0,75 mm.

TS 43 - TS 43 PLUS

TS 50 - TS 50 PLUS

FLOOR TREATMENTS



washing



scuffing



smoothing
re-smoothing



polishing
re-polishing




crystallization



- Corded floor machine available with two work widths
- Ideal for heavy-duty jobs such as scuffing and smoothing treatments
- Aluminum base and steel cogs for higher resistance against chemicals



- Detachable power cord to facilitate transport and maintenance
- 3 models available in 1100, 1800, and 2200 W power motors.

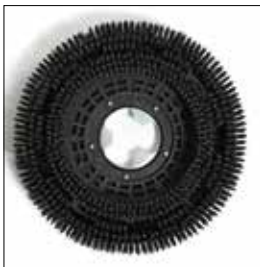


Steel mix brush.



Pad driver for sand paper.



Pad driver standard.

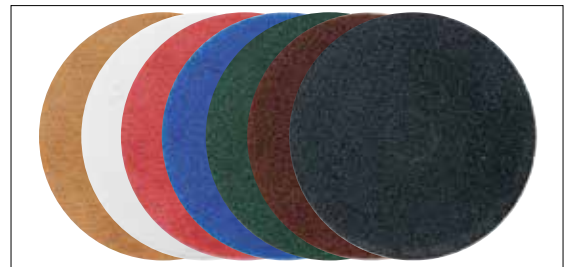

Abrasive pads in nylon, 22 mm thickness.


HEAVY LINE FLOOR MACHINES

TECHNICAL DESCRIPTION		TS 43	TS 43 PLUS	TS 50	TS 50 PLUS
Transmission	n.	3 cogs	3 cogs	3 cogs	3 cogs
Power	V/Hz	230/50	230/50	230/50	230/50
Power (average)	W	1100/nylon	1100/nylon-steel	1100/nylon	1100/nylon-steel
Power (average)	W	1800/nylon-steel	-	1800/nylon-steel	-
Power (average)	W	2200/steel	-	2200/steel	-
RPM speed	rpm	160	160	160	160
Brush	Ø mm	430	430	500	500
Pad driver	Ø mm	430	430	500	500
Tank capacity	l	15	15	15	15
Machine weight	Kg	42	42	45	45
Extra weight	Kg	2	2	2	2
Noise level (IEC 704/1)	dB(A)	61	61	61	61
Dimensions (WxHxL)	cm	46x120x56	46x120x56	50x120x56	50x120x56



HIGH SPEED FLOOR MACHINES

HIGH SPEED T UHS:
High speed polishing



T UHS 1500 S

FLOOR TREATMENTS



polishing
re-polishing



T UHS 1500 V

FLOOR TREATMENTS



polishing
re-polishing



T UHS 1500 S is an ideal floor machine for all restoration and dry polishing jobs at high speed.



T UHS 1500 V is the version with suction for dust collection in the container compartment.



HIGH SPEED FLOOR MACHINES



Exceptional balance makes the use of this machine extremely pleasant and effortless thanks to the gas spring of the handle.

TECHNICAL DESCRIPTION		T UHS 1500 S	T UHS 1500 V
Transmission		Direct	Direct
Power	V/Hz	230/50	230/50
Power (average)	W	1100	1100
RPM	rpm	1500	1500
Pad driver	Ø mm	480	480
Abrasive pads	Ø mm	505	505
Machine weight	Kg	38	38
Noise level (IEC 704/1)	dB(A)	61	61
Dimensions (WxHxL)	cm	54x126x61	54x126x61



Dust produced during operation is conveyed from the pad to a collection bag, preventing its dispersal back into the environment.

CHEMICALS

444850		TMB AM universal polishing Gel - anti-slip for marble, granite and ceramic. 12 pieces of 1 kg. each
444849		TMB GQ Gel polisher - anti-slip for granite, concrete, quartz and gres. 12 pieces of 1 kg. each
448378		TMB SP Silicates CONCRETE CONSOLIDATOR with Sodium and Potassium Silicates. 5 lt. tank
448379		TMB LITHIUM Silicates CONCRETE CONSOLIDATOR with Lithium Silicates. 5 lt. tank
448380		TMB Lux Nano-Lithium UV EXTRA SHINE and super resistant CONCRETE FINISHER, Lithium based. 5 lt. tank
448381		TMB Lux Lithium PASSAGEWAY CONCRETE SHINE FINISH resistant to high traffic, Lithium based. 5 lt. tank
448382		TMB LUX MARBLE Extra Polishing powder for marble. 5 kg tank.
448383		TMB Gel Lux Marble Polishing gel for marble. 1 kg tank.
448384		TMB Penetrating Marble-Granite Finish, protective finish polisher. 1 lt. tank
448386		TMB KRIS Marble Crystallizer for marble. 1 kg tank.
448387		TMB Lux Granite Polishing Powder for granite, gres. 5 kg tank.
448388		TMB Gel Lux Granite Polishing Gel for granite, gres. 5 kg tank.
448813		TMB WRM Water-repellent Detergent Daily maintenance and first floor set product. 1 kg tank.



TMB srl reserves the right, at any time, to make technical and/or equipment modifications without prior notification. The images are shown as reference only and are not binding as to the actual design and/or equipment - Copyright © TMB - CODE 302552 - Vers. 07 2019 - ENG



Your Better Choice

TMB srl - via Cà Nova Zampieri 5 - 37057 San Giovanni Lupatoto VR Italia - tmb@tmbvac.it - Tel. +39 045 8774299 - Fax +39 045 8774245

www.tmbvacuum.com